


# XRN500

## Dual Rewind

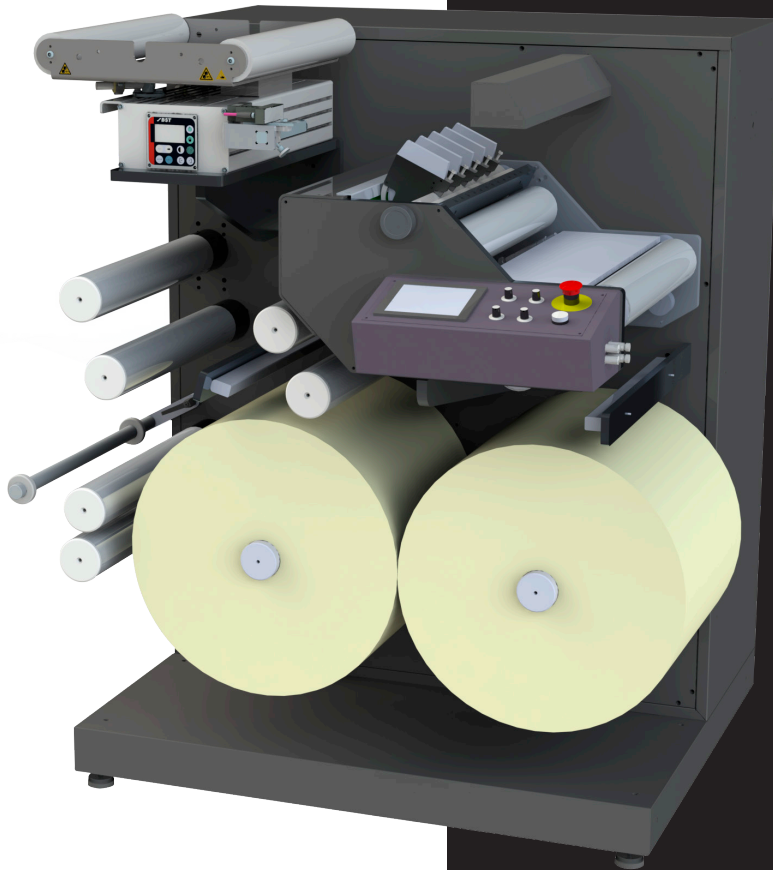

SPECIFICATIONS	METRIC	IMPERIAL
Web width	50 - 500 mm	2-20"
Substrate thickness	60 - 200 gsm	
Max input web speed	30 m/min	98 ft/min
<b>Rewinder</b>		
Max. diameter - dual rewind	550 mm	21.6"
Max. diameter - single rewind	600 mm	23.6"
Core diameter	76.2 mm	3"
Max. roll weight	100 kg	220 lbs
<b>Slitting Station</b>		
Knife type	Pneumatic crush (standard), Razor (optional)	
Minimum distance crush	12,7 mm	0.5"
Minimum distance razor	35 mm	1,38"
<b>Dimensions (WxDxH)</b>	1,3 x 1,4 x 1,6m	4.3 x 4.6 x 5.3 ft

The XRN500 is a Dual Rewind unit with constant tension control towards the press. It features stepless tension on the rewind roll and a tension dividing nip. Operates on both slack-loop and tight web presses. Dual rewind, knifebox and webguide are optional.

#### Features:

- Dual rewind with constant tension control towards press
- Tension dividing nip
- Stepless tension on rewind roll
- Air expanding mandrel in 76mm / 3"
- Operates on all Xeikon presses (or other)

#### Options:

- Crush knife slitting
- Razor blade slitting
- Web guide